2025 **KLR®650**





METALLIC MATTE OLD SCHOOL GREEN


PEARL CRYSTAL WHITE/METALLIC CARBON GRAY



Rear Tire 130/80-17 POWER **Front Brakes** Single 300mm disc with 2-piston calipers (and ABS) Engine 4-stroke, single cylinder, DOHC **Rear Brakes** Single 240mm disc with single-piston caliper Displacement 652cc (and ABS) **Bore x Stroke** 100.0 x 83.0mm DETAILS Compression 9.8:1 Ratio **Frame Type** Tubular, semi-double cradle **Maximum Torque** 39.1 lb-ft @ 4,500 rpm 30.0°/4.8 in Rake/Trail **Fuel System** DFI® with 40mm throttle body **Overall Length** 89.8 in Ignition CDI **Overall Width** 38.2 in Transmission 5-speed, return shift with wet multi-disc manual clutch **Overall Height** 57.7/56.3 in (screen hi/lo) **Final Drive** Sealed chain Ground 8.3 in Clearance **Electronic Rider** Anti-lock Brake System (ABS) Aids **Seat Height** 34.3 in

PERFORMANCE

Front Suspension /	41mm telescopic fork/ 7.9 in	Fuel Ca
Wheel Travel		Wheelb
Rear Suspension / Wheel Travel	Uni-Trak [®] single shock with adjustable rebound damping and adjustable spring preload/8.0 in	Color Cl
Front Tire	90/90-21	Warran

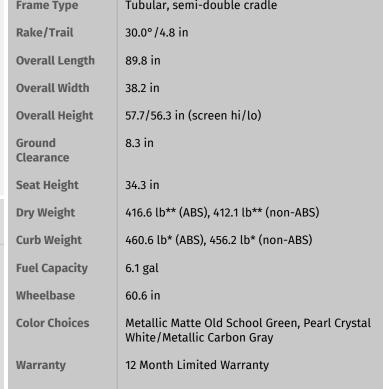



*Curb weight includes all necessary materials and fluids to operate correctly, full tank of fuel (more than 90 percent capacity) and tool kit (if supplied). **Dry weight does not include all necessary materials and fluids to operate correctly, full tank of fuel (more than 90 percent capacity) and tool kit (if supplied). KAWASAKI CARES: Read Owner's Manual and all on-product warnings. Always wear protective gear appropriate for the use of this vehicle. Never operate under the influence of drugs or alcohol. Protect the environment. The Kawasaki MULE[™] side x side is an off-highway vehicle only, and is not designed, equipped or manufactured for use on public streets, roads or highways. Obey the laws and regulations that control the use of your vehicle. ©2024 Kawasaki Motors Corp., U.S.A. Specifications subject to change. Visit Kawasaki-la.com for full product details.